#### TO ACCOMPANY PLANS DATED


# ANGLE THIMBLE EYE WHEN REQUIRED (SEE NOTE 2) ALTERNATIVE TERMINATION OF

Тур

# MESSENGER WIRES USING GUY CLAMPS

● ⊘

0

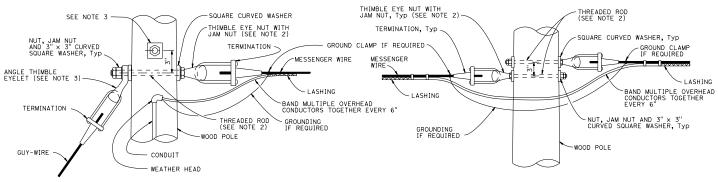

THIMBLE, THIMBLE EYE, OR STRAIN INSULATOR (SEE NOTE 2)

MESSENGER, TETHER, OR GUY-WIRE ~

0 0

© 2018 California Department of Transportation All Rights Reserved

#### TERMINATION OF WIRES USING AUTOMATIC DEAD END

ANGLE THIMBLE EYE WHEN REQUIRED (SEE NOTE 2) -

AUTOMATIC DEAD END-


MESSENGER, TETHER, OR GUY-WIRE



### DOUBLE LASHING DETAIL


OVERHEAD CONDUCTORS

USE IF d. IS GREATER THAN 11/2



### TYPICAL LASHING DETAIL

# USE IF d. IS 11/2" OR LESS

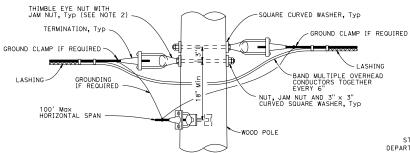

POLE AT TANGENT OR CORNER CONNECTION

## NOTES:

- 1. For guy wires use 3 clamps.
- 2. Use  $\frac{5}{8}$  ø except  $\frac{3}{4}$  ø at guyed wires
- 3. Install additional angle thimble eyelet at poles with two guy wires.

# DEPARTMENT OF TRANSPORTATION

#### TEMPORARY WOOD POLES DETAILS No. 1

STATE OF CALIFORNIA

NO SCALE

9RSP ES-19A DATED OCTOBER 19, 2018 SUPERSEDES STANDARD PLAN ES-19A DATED MAY 31, 2018 - PAGE 562 OF THE STANDARD PLANS BOOK DATED 2018.

REVISED STANDARD PLAN RSP ES-19A

#### POLE AT DEAD END WITH GUY-WIRE CONNECTION


3 BOLT GUY, CLAMPS Tot 2, Typ (SEE NOTE 1)

6" TO 12'

SERVE DEAD END WITH 5

STEEL WIRE

WRAPS Min\_OF GALVANIZED

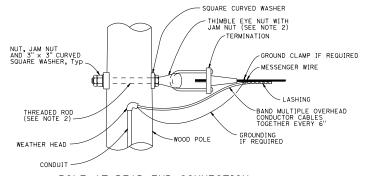

POLE AT DEAD END CONNECTION

2018

REVISED

STANDARD

PL Ž

RSP

m

S

19

>